


SLAG REMOVAL / EDGE ROUNDING



- Cost-effective machining
- Ergonomic and intuitive operation
- High stock removal rate
- Cool grinding / hardly any heat input into the workpiece
- Directionless machining
- Compact design

FURTHER INFORMATION:

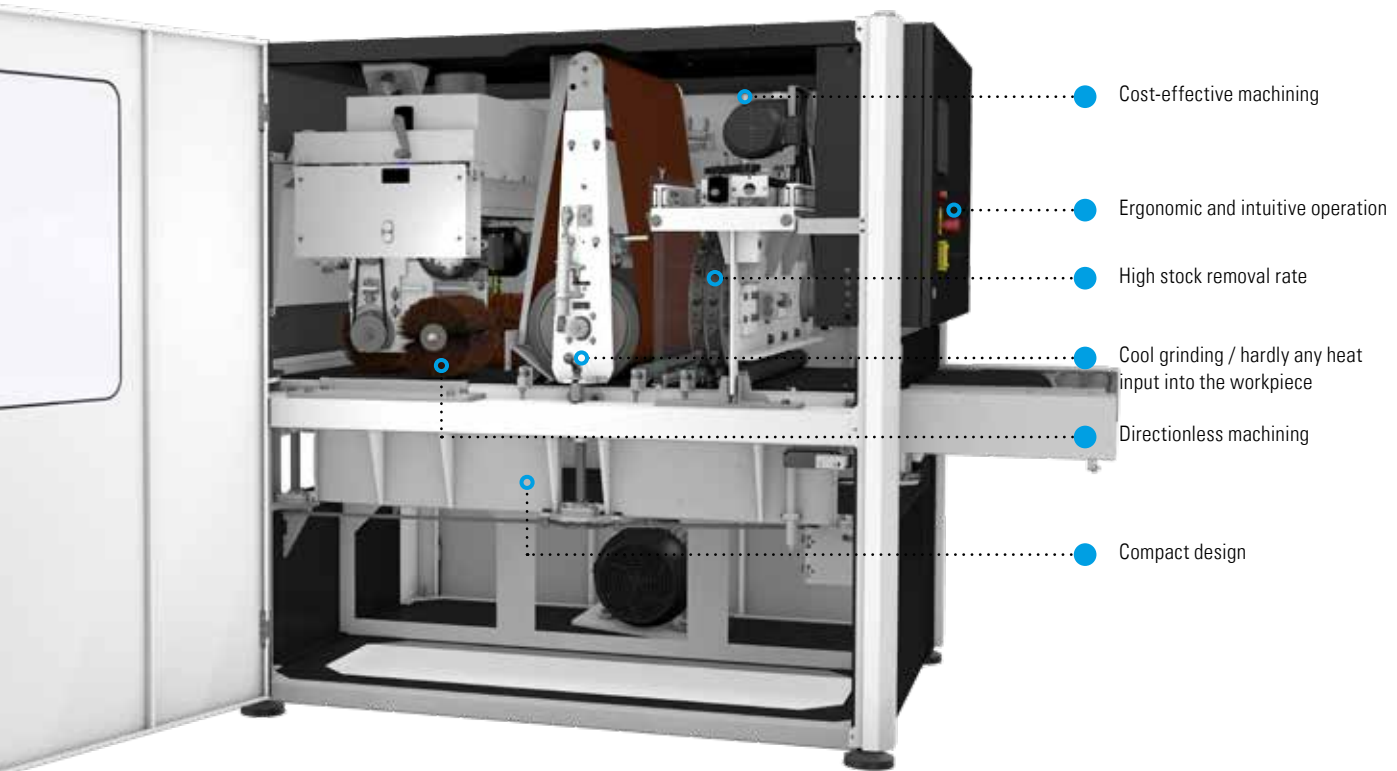

TECHNICAL DATA	SMD 133 DRE
Working width max.	950 mm
Workable material thickness	3 - 100 mm
Load	300 kg/rm
Voltage	400 V, 50 Hz / 480 V, 60Hz
Network structure	3-PEN / 3-PE+N
Total current consumption	51.4 A / 51.4 A
Total power	23.5 kW / 23.9 kW
Insulation class	IP 42
Infinitely variable feed speed	0.5 - 8 m/min.
Weight	2900 kg
Dimensions (W/D/H)	1595/2665/1906 mm

- Removing slag, deburring and edge rounding in one throughfeed pass, saves time.
- The mechanical removal of slag by power-pins gives long tool life and reduces grinding costs enormously
- A soft, large diameter, contact roller, enables to process warped parts and accepts thickness tolerances
- Our 2 rotary heads give a perfectly even edge rounding
- Both mild- and stainless steels can be processed
- Intuitive controls make it easy to operate the machine
- Individual operation of each head
- High quality and solid construction
- The optimum accessibility of the machine enables easy tool change, cleaning and maintenance
- The compact construction of the machine requires limited floor space



before



after

OPTIONS



[1]

[1] Special molding for processing of small parts